




Door Closer

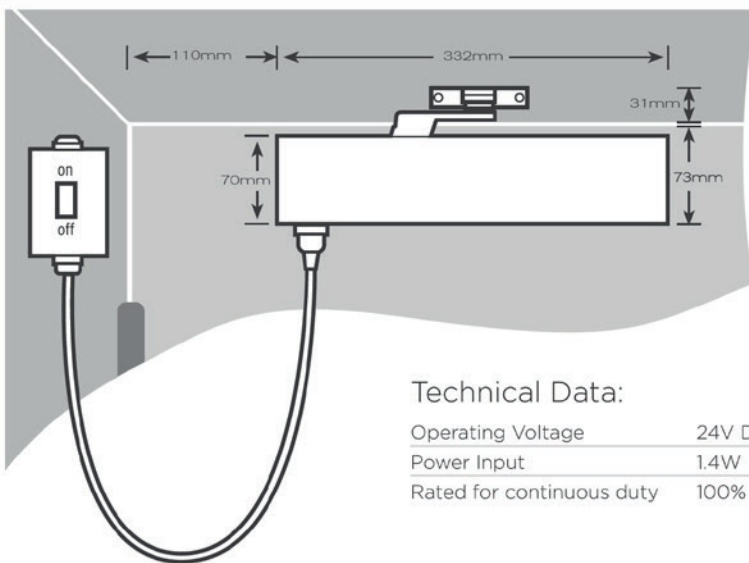

Technical Data:

| | |
|---------------------------|-------------------|
| Operating Voltage | 24V DC + or - 15% |
| Power Input | 1.4W |
| Rated for continuous duty | 100% |

41003 electromagnetic free swing door closer

- Door closer will allow door to function same way as a door without a closer until fire alarm is activated, when it will self close
- Standard unit suitable for doors up to 1100mm. For doors up to 1250mm suffix '5' and for doors up to 1400mm suffix '6' (ie 410045 or 410046)
- 24V operating voltage
- Available in satin or polished stainless steel & silver enamel with matching arm

Technical Data

Fire Test Certificate:
Certifire approved

Certification:
Tested to EN1154
Classification 4.8.4/4.1.1.3

Maintenance

To be carried out by approved specialists only.
A door stop must be fitted to limit the opening of the door. Regularly check the assembly for tolerance and undue wear. Tighten any screws or bolts that may become loose and adjust the closer if necessary. Annually grease the moving parts and check the operation of the doors adjusting if necessary. Repair works or any replacements have to be executed by the manufacturer or specialists authorised by the manufacturer.
If for any reason the products fail due to a defect in manufacture, contact us and we will advise you of the replacement procedure.