


Floor Spring

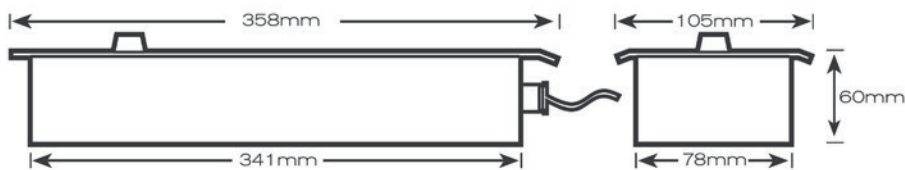

Technical Data:

Operating Voltage	24V DC + or - 15%
Power Input	2.3W
Rated for continuous duty	100%

46005 electromagnetic hold open floor spring unit

- Available in three power sizes:
460054 Size 4 for doors up to 1100mm
460055 Size 5 for doors up to 1250mm
460056 Size 6 for doors up to 1400mm
- Variable power size EN 1-4
- Adjustable closing speed & latch action
- Incorporates electromagnetic hold open device that automatically releases in event of a fire
- Hold open angle between 75 & 180 degrees with approximately 3 degrees fall back
- Backcheck
- Available in satin or polished stainless steel
- CE marked

Technical Data

Fire Test Certificate:

Certifire approved

Certification:

Tested to EN1155

Classification 4.8.3 or 4 or 6.1.1.3

Maintenance

To be carried out by approved specialists only.
 A door stop must be fitted to limit the opening of the door.
 Regularly check the assembly for tolerance and undue wear.
 Tighten any screws or bolts that may become loose and adjust the closer if necessary. Annually grease the moving parts and check the operation of the doors adjusting if necessary. Repair works or any replacements have to be executed by the manufacturer or specialists authorised by the manufacturer.
 If for any reason the products fail due to a defect in manufacture, contact us and we will advise you of the replacement procedure.