




Transom Closers

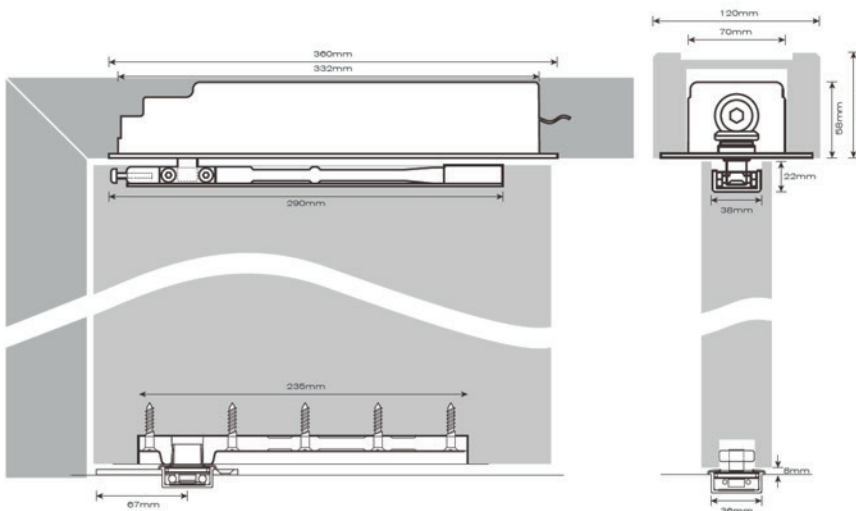

Technical Data:

Operating Voltage	24V DC + or - 15%
Power Input	2.3W
Rated for continuous duty	100%

47004 electromagnetic free swing transom closer

- Available in two sizes:
470044 Size 4 for doors up to 1100mm
470045 Size 5 for doors up to 1250mm
- Adjustable closing speed & latch action
- Door will function same way as door without closer until the fire alarm is activated, when the door will self close
- Backcheck
- Available in two power sizes
- Hold open angle between 75 & 180 degrees with approximately 3 degrees fall back
- Suitable for doors up to 1250mm wide
- Available in satin or polished stainless steel & silver enamel
- CE marked

Technical Data

Fire Test Certificate:

Certifire approved

Certification:

Tested to EN1154

Classification 4.8.3 or 4 or 6.1.1.3

Maintenance

To be carried out by approved specialists only.
 A door stop must be fitted to limit the opening of the door. Regularly check the assembly for tolerance and undue wear. Tighten any screws or bolts that may become loose and adjust the closer if necessary. Annually grease the moving parts and check the operation of the doors adjusting if necessary. Repair works or any replacements have to be executed by the manufacturer or specialists authorised by the manufacturer.
 If for any reason the products fail due to a defect in manufacture, contact us and we will advise you of the replacement procedure.

Aspex UK Limited

Unit E, Winchester Avenue, Blaby, Leicester, LE8 4GZ
 T: 0116 278 3506 F: 0116 278 4069
 E: sales@aspex-uk.co.uk

Aspex Scotland

39 Deerdykes View, Westfield, Cumbernauld, G68 9HN
 T: 01236 720061 F: 01236 780170
 E: scotland@aspex-uk.co.uk