





Cylinder



Sizes

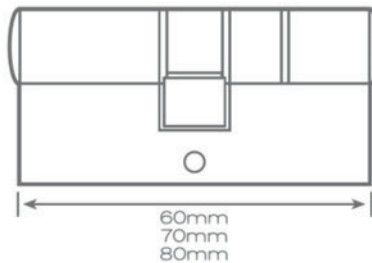

(Non-standard & offset cylinder lengths are also available in increments of 5mm)

37602 euro profile double cylinder & turn (60mm)

37702 euro profile double cylinder & turn (70mm)

37802 euro profile double cylinder & turn (80mm)

- Patented and registered system preventing illegal key application
- Multi profile key section allows for very large and complex grand master key systems
- Anti-pick mushrooms and steel anti-drill inserts
- Kitemark approved TS007 1 star cylinder that protects against drilling, picking, and bumping
- Construction key optional
- Nickel silver keys
- Patent protected until 2032

Technical Data

Certification:

Tested to EN1303
Grade 6 for key security, which is the highest grade

Maintenance

To be carried out by approved specialists only.
The keyway of the cylinder should be sprayed with a recommended lock spray no less than once a year. This lock spray contains lubricants and anti-static agents. Graphite or oil should not be used as these will jam the mechanism.

If for any reason the products fail due to a defect in manufacture, contact us and we will advise you of the replacement procedure.