


60031 Door Stop

Not to scale

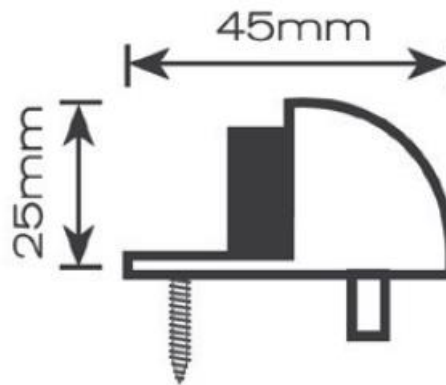

Overview

60031 floor fixed door stop with threaded location bolt and rubber buffer

- Location bolt extends 15mm into the floor providing very secure fixing

Finishes

- SSS Satin Stainless Steel
- PSS Polished Stainless Steel
- SAA Satin Anodised Aluminium
- MB Matt Black

Maintenance

- To be carried out by approved specialist only. No abrasives or chemical materials to be used, wipe with soft damp cloth, or when necessary warm soapy water and a soft cloth. At least once a year, check for correct tolerance and wear and tighten any screws that may become loose. If for any reason the products fail due to a defect in manufacture, contact us and we will advise you of the replacement procedure

Certification

NA

Performance Test

NA

Please note:

Aspex reserves the right to change specification without notice.