


## Pull Handle

Not to scale

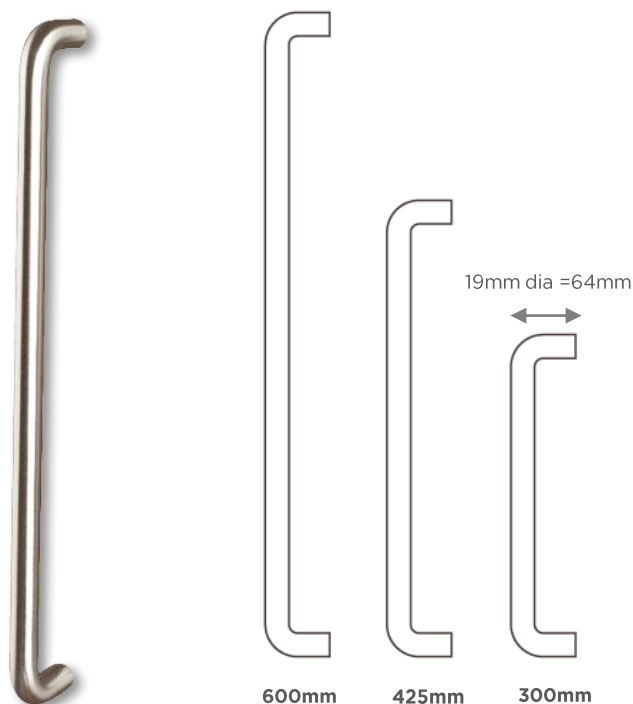

<b>18194</b>	300x19mm Pull handle bolt through fixed
<b>18195</b>	425x19mm Pull handle bolt through fixed
<b>18196</b>	600x19mm Pull handle bolt through fixed

### Overview

- Bolt through fixed with M8 machine screws
- Suitable for doors up to 54mm thick
- Manufactured from tubular grade 304 stainless steel
- Dimensions comply with the requirements of BS8300 and Approved Document M

### Finishes

- SSS Satin Stainless Steel
- PSS Polished Stainless Steel

### Maintenance

- To be carried out by approved specialist only
- No abrasives or chemicals to be used.
- Wipe with soft, damp cloth or, when necessary, warm soap warm and a soft cloth.
- At least once a year, check for tolerance and wear, and tighten any screws that may become loose.
- If for any reason, the products fail due to a defect in manufacture, contact us and we will advise on the replacement procedure.

### Packaging

Individually boxed with screws and care instructions. Multiple handles in an outer box (varies per order).

### Please note:

Aspex reserves the right to change specification without notice.