


EnduroSC

Not to scale

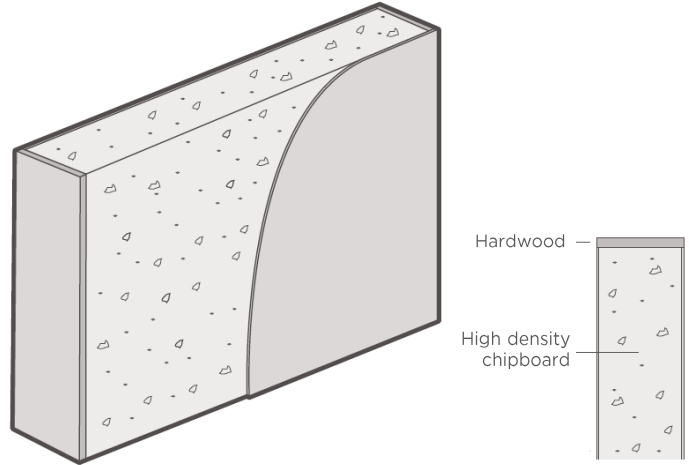

Specification

This door is manufactured with a solid core and has hardwood lipping's to all 4 sides and the door face is primed for onsite painting.

- High density 3-layer particleboard core
- 8mm hardwood lipping's on all 4 sides
- Overall thickness 44mm for NFR & FD30 / 54mm for FD60
- Standard or bespoke sizes

Finish Options

- Primed for on-site painting
- Factory painted
- Laminated
- Primed
- Veneered

Performance

- NFR, FD30 or FD60
- 32dB acoustic rated for 44mm / 35dB acoustic rated for 54mm (with the correct seal arrangement)
- Tested to DD171 and classed as severe duty

Suitable for...

- ✓ PAS24 Apartment Entrance
- ✓ PAS24 Communal/ Circulation
- ✓ Communal/ Circulation
- ✓ Risers
- ✓ Commercial/ Education/ Healthcare

FSC Certified

Sustainably sourced & carefully produced to design specification

Packaging

Protective packaging and delivered in palletised form (varies per order)

