


Enduro PAS24 Entranced - Primed & Painted

Not to scale

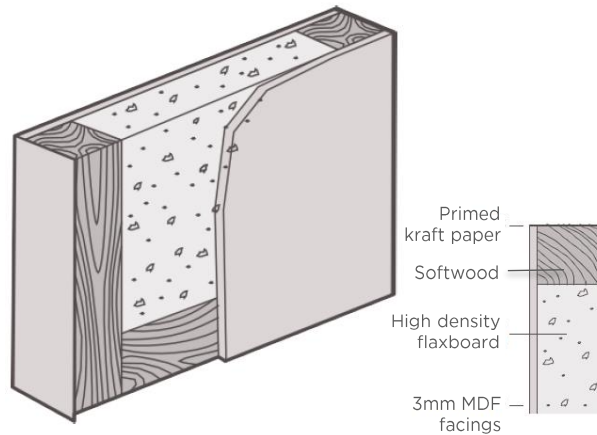

Specification

This door is manufactured with a solid core and softwood stiles and rails to all 4 sides.

The edge of the door leaf has primed kraft paper edge banding and the face is primed allowing them to be painted on site with no prior preparation required.

- High density solid Flaxboard core
- 28mm Softwood stiles and rails
- 3mm MDF face
- Primed kraft paper edge-banding to 2 long edges
- Overall thickness - 44mm for NFR & FD30 / 54mm for FD60
- Standard sizes or bespoke to order

Performance

- NFR, FD30 or FD60
- 32dB acoustic rated for 44mm / 33dB acoustic rated for 54mm

Finish Options

- Primed for on-site painting
- Factory painted

Suitable for...

- ✓ Internal Apartment
- ✓ Risers

FSC Certified

Sustainably sourced & carefully produced to design specification

Packaging

Protective packaging and delivered in palletised form (varies per order)

