


## 38 Series Lock Cases

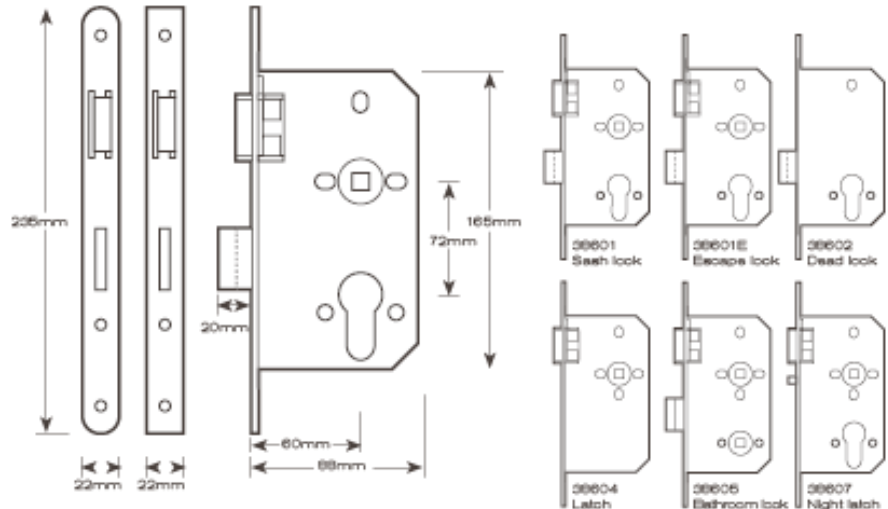

<b>38601</b>	Euro profile sashlock case	<b>38604</b>	Latch
<b>38601E</b>	Euro profile escape sashlock case	<b>38605</b>	Bathroom lock
<b>38602</b>	Euro profile deadlock case	<b>38607</b>	Mortice night latch

### Overview

- Self adjusting follower is engineered to tightly grip the lever handle spindle
- Heavy duty springing with short travel follower suitable for use with unsprung door furniture
- Double throw 20mm deadbolt
- 72mm to comply with BS8300
- Boxed striking plate
- Suitable for through fixed lever handles and escutcheons
- Reversible latch bolt
- Matching satin stainless steel forend and strike as standard.

### Maintenance

- Every 3 months, check the forend, strike plate and cylinder retaining screws are tight. To be carried out by approved specialists only.

### Fixings

38mm centre bolt

### Handing

Reversible (Left/Right)

### Backset

60mm

### Follower

8mm

### Lockcase depth

90mm

### Height

165mm

### Lockcase thickness

16mm

### Forend

Radius or Square

### Forend size

235mm (L) x 19mm (W)

### Faceplate & strike

Grade 304 Satin Stainless Steel

### CE Marked, Suitable for use on Fire Doors

- Tested to EN 1634-1 2014 on 30 and 60 minute timber fire doors and 240 minute metal fire doors
- For 30 and 60 min fire doors use 1mm interdens behind the strike plate and 2mm interdens around the lockcase

### Warranty

Supported by a 2 year warranty

### Standards

CE Marked and fully tested to EN 12209 2003

### Grade 3 Category of use

High frequency of use by public, with little incentive to exercise care

### Certified Approved

CF5543

### BS EN 12209 Classification

3X810G-B020

### BS EN 12209 CE Cert No

0086-CPR-658466