


# 41008 Door Closer

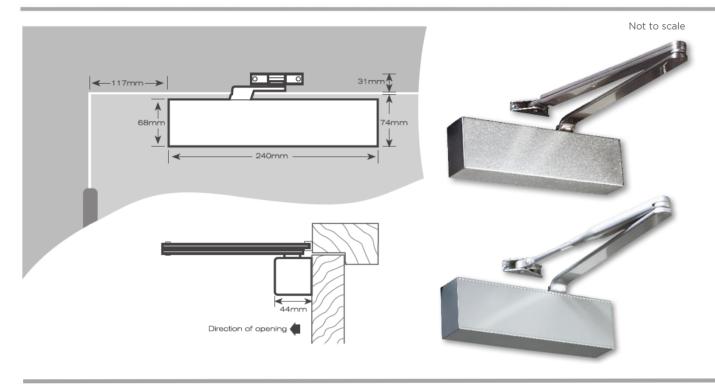

## Overview

- Adjustable power size EN 2-4
- Self-adjusting backcheck (can be deactivated)
- Suitable for interior doors up to 1100mm and 950mm
- Complies with requirements of BS8300 & ADM for standard doors over 826mm and fire doors over 900mm wide
- Adjustable closing speed between O<sup>o</sup> and 15<sup>o</sup>, & 15<sup>o</sup> and 180<sup>o</sup>
- · Adjustable latch action

#### **Finishes**

- SSS Satin Stainless Steel
- PSS Polished Stainless Steel
- SE Silver Enamel

## Maintenance

- To be carried out by approved specialists only
- A door stop must be fitted to limit the opening of the door
- Regularly check the assembly for tolerance and undue wear
- Tighten any screws or bolts that may become loose and adjust the closer if necessary
- Annually grease the moving parts and check the operation of the doors adjusting if necessary
- Repair works or any replacements have to be executed by the manufacturer or specialists authorised by the manufacturer
- If, for any reason, the product fails due to a defect in manufacture, contact us and we will advise on the replacement procedure

## **Standards**

CE Marked Fully tested to EN1 154 Classification 4.8.4/2.1.1.3

## **Performance**

Tested to meet the requirements of PAS24 as part of a compliant door set

## Warranty

Supported by a 2 year warranty

#### Please note:

Aspex reserves the right to change specification without notice.