


## Lever Handle - CHOICE OF 5

Not to scale



ASP14194 - Arched Lever

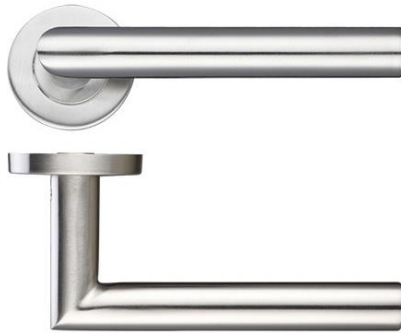

ASP36888 - Mitred Lever



ASP13194 - Straight Lever



ASP16194 - Bar Arched Lever



ASP17194 - T Bar Lever

19mm lever handle on 52 x 8mm rose

### Overview

- Sprung rose with through fixing
- Spindle fast fixing system prevents levers from pulling off the doors
- Concealed fixings to prevent illegal tampering
- Lever fixed to metal inner rose
- Available in satin stainless steel
- Suitable for use on FD30 & FD60 fire doors

### Finish

- SSS Satin Stainless Steel

### Maintenance

- To be carried out by approved specialist only
- No abrasives or chemicals to be used.
- Wipe with soft, damp cloth or, when necessary, warm soap warm and a soft cloth.
- Every 3 months, check that lever handle grub screw is flush with the surface on the handle. If it is projecting, retighten it.
- If the rose is loose, remove the rose cover and tighten the through fixing bolts.
- If for any reason, the products fail due to a defect in manufacture, contact us and we will advise on the replacement procedure.

### Certification

EN1906 Durability - Grade 3

### Performance Test

Tested to 200,000 cycles

### Warranty

Supported by a 10 year warranty