

novista
sliding doors



aspex

novista sliding door system

The name Novista is derived from the Italian for No Vista or No View, which perfectly describes this pocket sliding door system as when the door leaf is opened it disappears completely.

These pocket sliding door systems are an ideal space saver as the door leaf opens into the wall cavity, leaving the wall and the area around the door clear.



The Novista Architrave Free pocket sliding door system is sleek and elegant and has no visible jambs or architraves. When the door leaf is opened it disappears completely into the wall cavity.

Full height or Infinite installations are possible with either a timber or glass door in either single or double boarded walls between 95mm and 125mm thick, with a clear opening size of up to 3000mm high and 3000mm wide.

This Novista Pocket sliding door system is supplied with innovative extruded aluminium profiles for single or double boarded walls with the plasterboard fixed directly to this, forming a rigid construction for walls from as narrow as 95mm thick.


Nylon rollers and an aluminium track ensure silent operation, and with no bottom channel and a guide that is completely hidden within the wall cavity the floor finish can be continued from room to room.

The door stop post has integral seals and can be mounted either into the adjacent parallel wall or into one running horizontally to maximise space.

novista sliding door system

in wall

The top hanging track for this system is mounted within the wall above the door and is completely concealed.

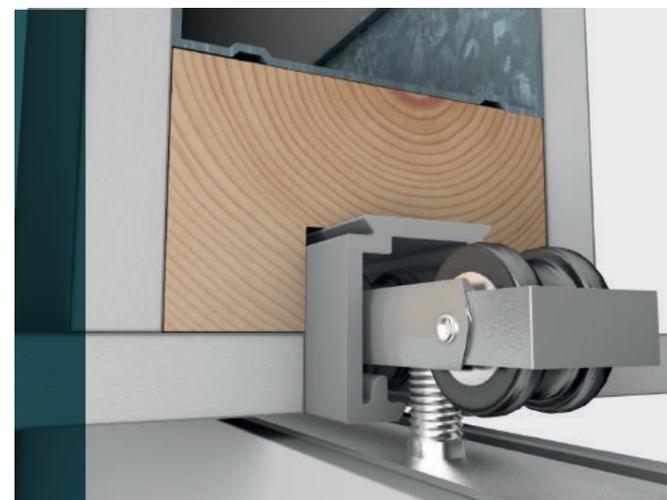

silent

The aluminium track is mounted within a timber beam and this, together with the nylon wheels, ensures silent operation.

infinite

The top hanging track for this system is mounted in the ceiling and when the door is opened a full height space is created.



glass


This system is suitable for 8, 10 or 12mm thick glass doors either mounted within the wall or full height.

walls


The Novista Sliding Door system is suitable for either double or single boarded walls with either 12.5 or 15mm boards, and a wall thickness as thin as 95mm is possible, making it one of the slimmest systems available.



single boarded walls

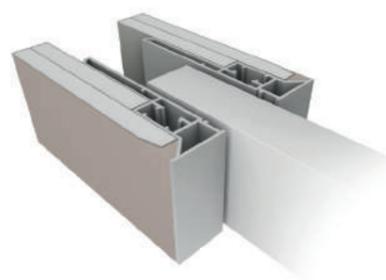


double boarded walls

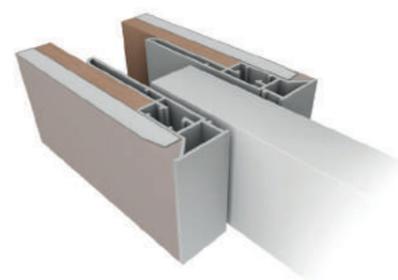

double boarded walls
(with timber board)

telescopic

This space-saving system is ideal for situations where the adjoining wall is not wide enough to accommodate the full door width.

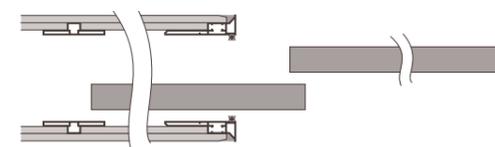

accessories

A full range of accessories for the timber and glass sliding doors is available in a wide variety of finishes.



in wall sliding door system

With this system, the top hanging track is mounted within the wall above the door and the plasterboard profile that is supplied ensures that this is completely hidden.

- Maximum opening height 3000mm
- Maximum opening width 3000mm (single), 6000mm (double)
- Soft close mechanism (maximum door leaf weight 80kg)
- Timber door leaf
- Suitable for 70mm, 75mm or 100mm stud wall
- 12.5mm or 15mm plasterboard
- Double or single boarded walls
- Minimum wall thickness 95mm (70mm stud and 12.5mm plasterboard)
- Door weight capacity of 120kg
- Double door option available with a continuous track and no unsightly joint
- Single or double doors
- The floor guide is located within the wall cavity and is not visible when the door is either fully open or fully closed
- The hangers have nylon wheels with ball bearings, which provide silent operation
- Easy to install

Soft close allows the door to close slowly and silently, which helps to eliminate the possibility of hairline cracks appearing in the plaster. The ABS also reduces the risk of accidents as it helps to avoid fingers being trapped.







in wall sliding door system

The unique profiles of the Novista sliding door system are easy to install and ensure that the wall is very rigid, with either a single or double plasterboard. A timber panel can be incorporated, which is ideal for tiled walls or where something is required to be fixed to the wall.


Head section




Bottom section

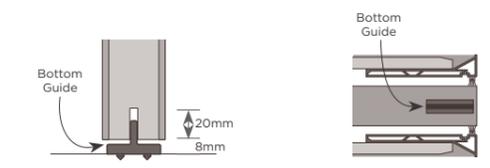


Single boarded wall - one 12.5mm plaster board

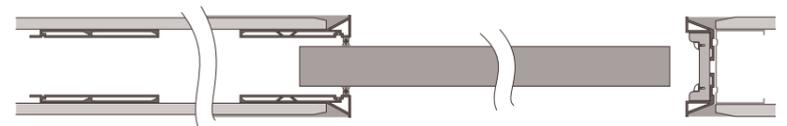

Double boarded wall - two 12.5mm plaster boards

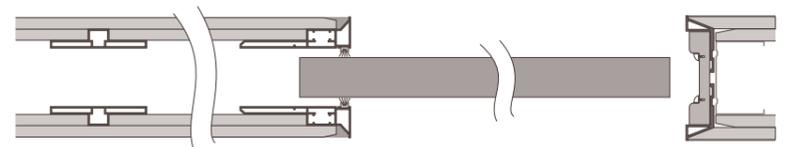

Double boarded wall - two 15mm plaster boards or one 18mm timber board and 12.5mm plaster board

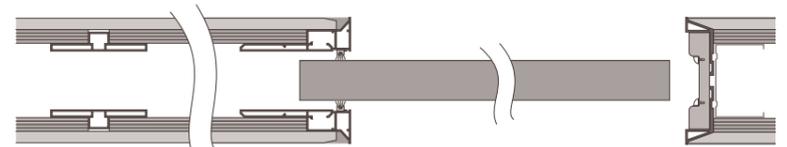

Size and wall options

Stud	Plasterboard	Door Thickness	Max Opening Height	Max Opening Width
70mm	Single	35	2040	1230
70mm	Double	35	2300	1500
75mm	Single	40	2040	1230
75mm	Double	40	2300	1500
100mm	Single	54	2040	1230
100mm	Double	54	3000	3000

infinite sliding door system

With this system, the bottom of the aluminium top hanging track is mounted flush with the ceiling, which can then run uninterrupted from room to room, allowing one large space to be created when the door is open.


- Maximum opening height 3000mm
- Maximum opening width 3000mm (single), 6000mm (double)
- Soft close mechanism (maximum door leaf weight 80kg)
- Timber door leaf
- Suitable for 70mm, 75mm or 100mm stud wall
- 12.5mm or 15mm plasterboard
- Double or single boarded walls
- Minimum wall thickness 95mm (70mm stud and 12.5mm plasterboard)
- Door weight capacity of 120kg
- Double door option available with a continuous track and no unsightly joint
- Single or double doors
- The floor guide is located within the wall cavity and is not visible when the door is either fully open or fully closed.
- The hangers have nylon wheels with ball bearings, which provide silent operation
- Easy to install




infinite sliding door system

The unique profiles of the Novista sliding door system are easy to install and ensure that the wall is very rigid with either a single or double plasterboard. A timber panel can be incorporated, which is ideal for tiled walls or where something is required to be fixed to the wall.


Head section




Bottom section

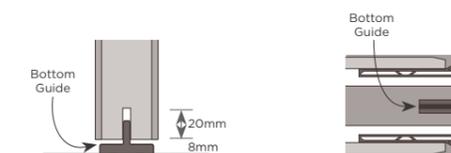


Single boarded wall - one 12.5mm plaster board

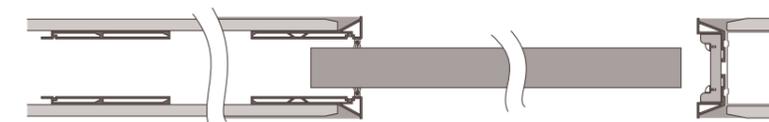

Double boarded wall - two 12.5mm plaster boards

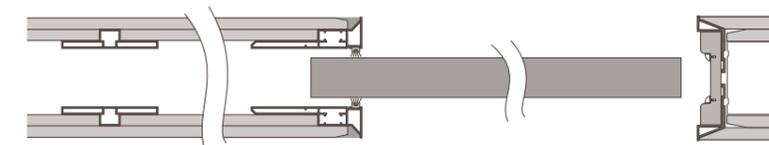

Double boarded wall - two 15mm plaster boards or one 18mm timber board and 12.5mm plaster board

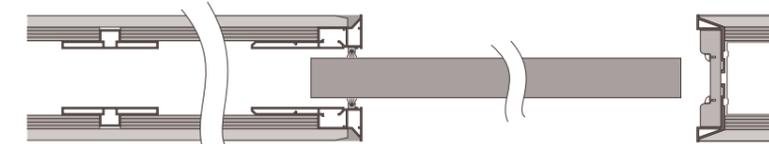

Size and wall options

Stud	Plasterboard	Door Thickness	Max Opening Height	Max Opening Width
70mm	Single	35	2040	1230
70mm	Double	35	2300	1500
75mm	Single	40	2040	1230
75mm	Double	40	2300	1500
100mm	Single	54	2040	1230
100mm	Double	54	3000	3000


telescopic sliding door system

The Novista sliding door system is also available with telescopic doors for installation where there is either not enough adjacent wall space for the full width single door or where both double doors are required to open into one wall.


The In Wall and Infinite systems are available with this option and the doors open simultaneously, utilising either a carry bar or belted mechanism.

- Maximum opening height 3000mm
- Maximum opening width 3000mm
- Belted or carry bar operating mechanism
- 44mm timber door leaf
- 2 x 75mm studs
- Double or single boarded walls
- Door weight capacity 120kg
- The floor guide is located within the wall cavity and is not visible when the door is either fully open or fully closed
- The hangers have nylon wheels with ball bearings, which provide silent operation
- Easy to install

Head section

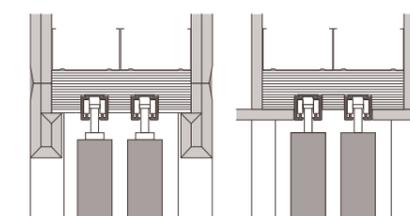

Double boarded wall - two 12.5mm plaster boards

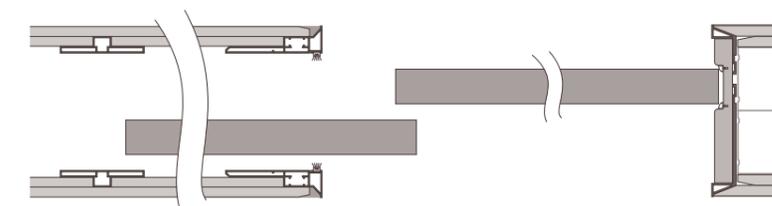

Size and wall options

Stud	Plasterboard Thickness	Door Height	Max Opening Width	Max Opening
2 x 75mm	Double	44	3000	3000




glass sliding door system




The Novista sliding door system is available with a glass door leaf in either the In Wall or Infinite configuration.

- Maximum height 3000mm
- Maximum width 2000mm (single), 4000mm (double)
- Glass door leaf 8, 10 or 12mm thick
- Suitable for 70mm or 75mm stud walls
- Door weight capacity of 100kg
- 12.5mm or 15mm plasterboard
- Double or single boarded walls
- Minimum wall thickness 95mm (70mm stud and 12.5mm plasterboard)
- Double door option available with a continuous track and no unsightly joint
- Single or double doors
- The hangers have nylon wheels with ball bearings, which provide silent operation


Head section

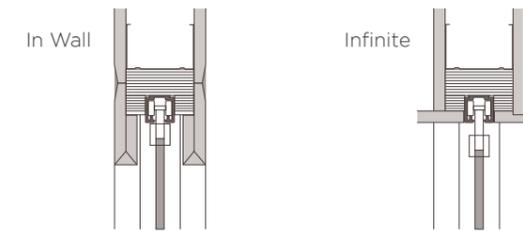

Single boarded wall




Double boarded wall

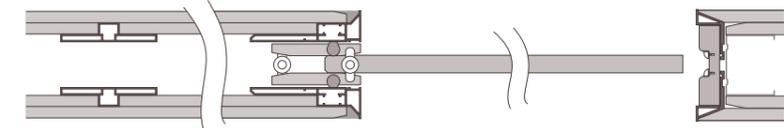


accessories sliding door system



Brass accessories

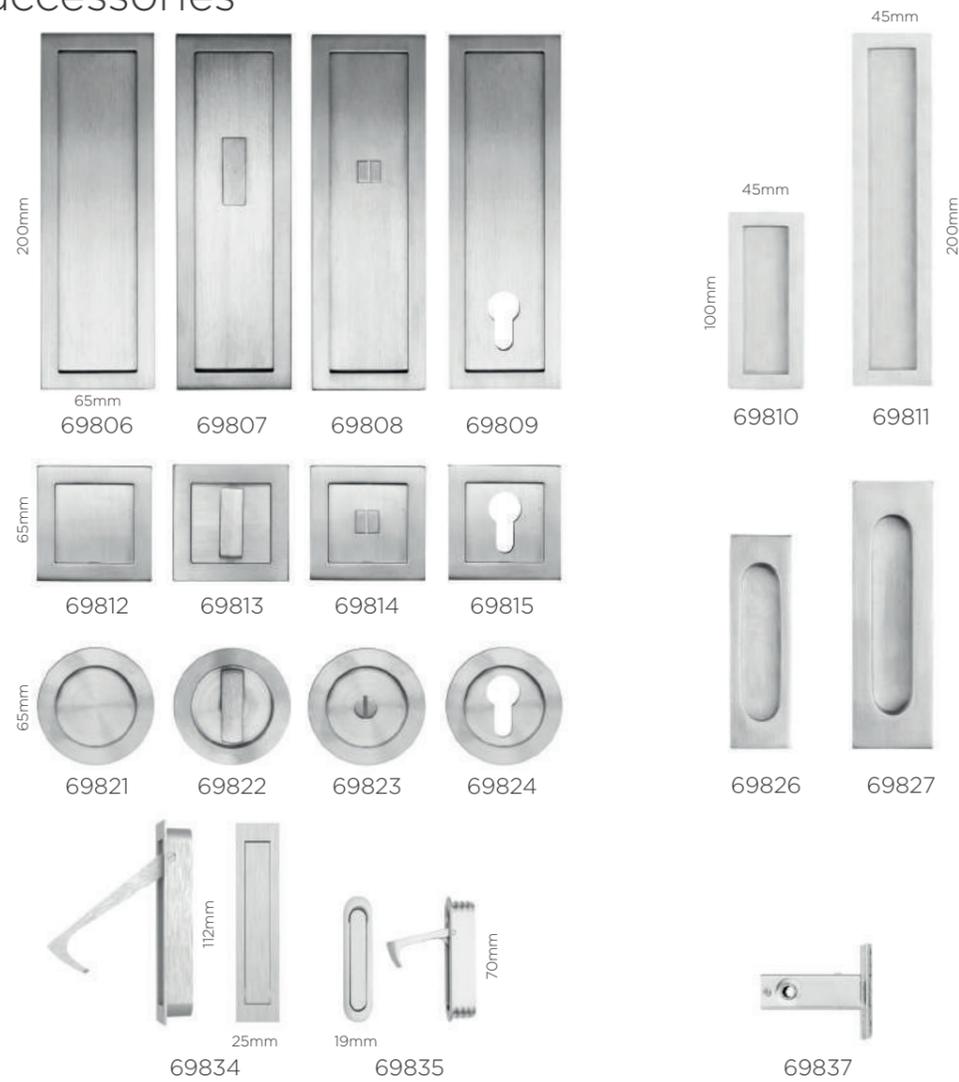

Finishes - all brass accessories are available in these finishes

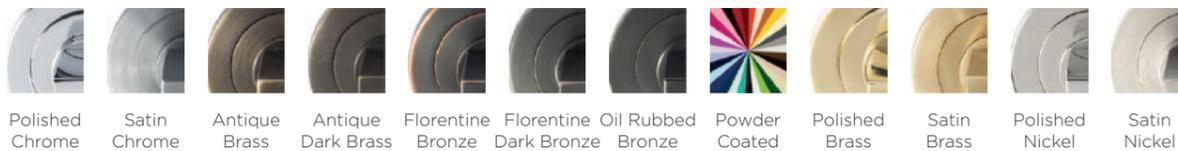


Stainless Steel accessories - available in polished or satin finish



Door leaf



Timber door leaves can be supplied with the sliding door system prepared for the top hangers and bottom guide in a range of finishes including Primed, Painted, Veneered and Laminated.

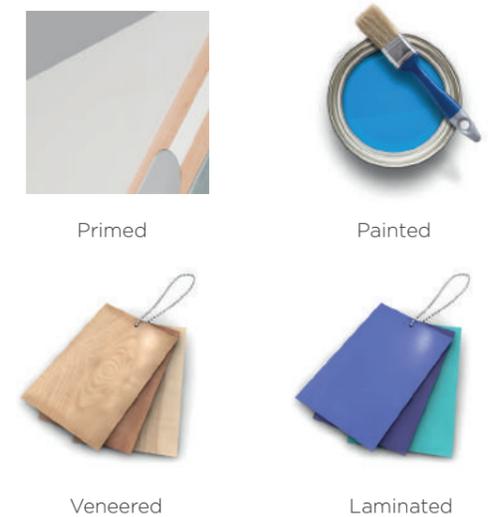



ASPEX UK
The Whittle Estate
Cambridge Road.
Whetstone
Leicestershire,
LE8 6LH
T: 0116 278 3506
F: 0116 278 4069

ASPEX SCOTLAND
39 Deerdykes View
Westfield,
Cumbernauld
G68 9HN
T: 01236 720061
F: 01236 780170

W: aspex-uk.co.uk
E: sales@aspex-uk.co.uk