


Door Closer

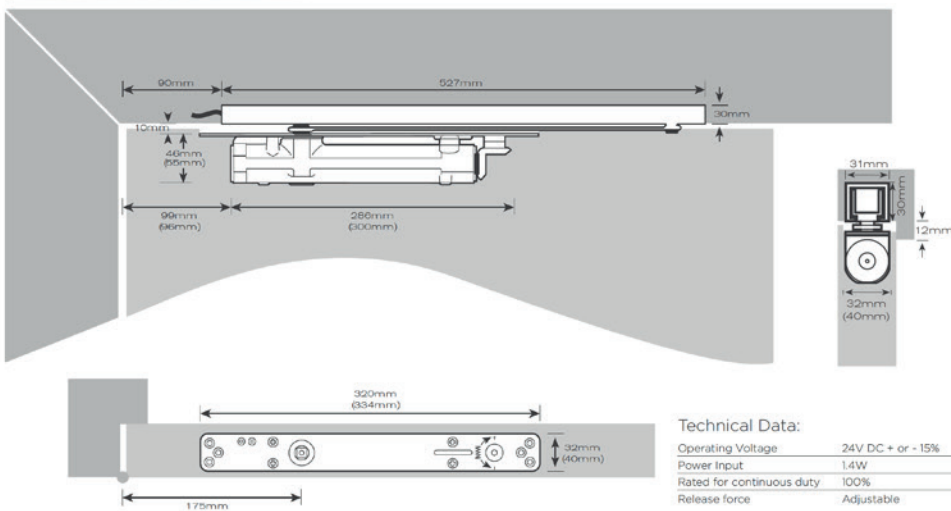

Technical Data:

Operating Voltage	24V DC + or - 15%
Power Input	1.4W
Rated for continuous duty	100%
Release force	Adjustable

45006 concealed electromagnetic hold open door closer

- Selectable hold open angle between 80 & 120 degrees
- Exact open can be achieved with no fall back or creep
- Power supplied to the arm so a power loop is not required
- Available in satin or polished stainless steel & silver enamel
- CE marked

Technical Data

Fire Test Certificate:
Certifire approved

Certification:
Tested to EN1155
Classification 4.8.4/2.1.1.3

Maintenance

To be carried out by approved specialists only.
A door stop must be fitted to limit the opening of the door. Regularly check the assembly for tolerance and undue wear. Tighten any screws or bolts that may become loose and adjust the closer if necessary. Annually grease the moving parts and check the operation of the doors adjusting if necessary. Repair works or any replacements have to be executed by the manufacturer or specialists authorised by the manufacturer.
If for any reason the products fail due to a defect in manufacture, contact us and we will advise you of the replacement procedure.