




Hinges

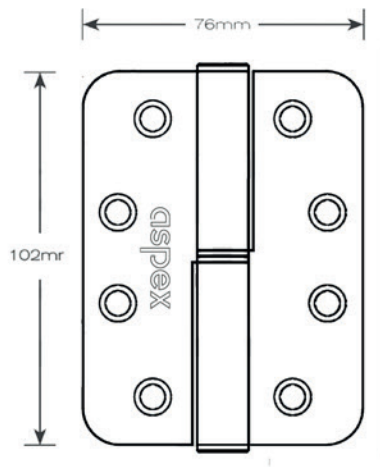

20050 102x76x3mm self lubricating lift off hinge

- Fire tested suitable for 30 & 60 minute timber doors
- BS EN 1935 Grade 11 tested
- CE marked
- Certifire approved
- Radiused corners
- Available in satin stainless steel

Maintenance

To be carried out by approved specialist only.

No abrasives or chemical materials to be used. Wipe with soft damp cloth or, when necessary, warm soapy water and a soft cloth. At least once a year, check for tolerance and wear, and tighten any screws that may become loose.

If for any reason the products fail due to a defect in manufacture, contact us and we will advise you of the replacement procedure.