
# SPO

# www.aspex-uk.co.uk

# Door Closer

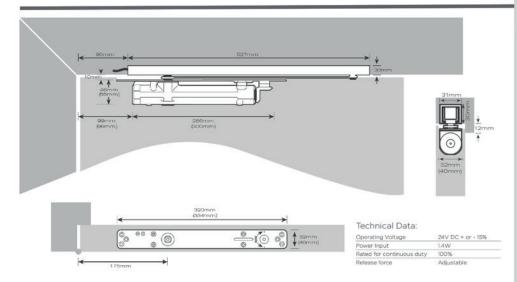

# 45005 concealed electromagnetic hold open door closer

- Adjustable power size EN 3-6
- Suitable for doors up to 1400mm wide & up to 180kg
- Minimum door thickness 54mm
- Selectable hold open angle between 80 & 120 degrees
- Exact open can be achieved with no fall back or creep
- Power supplied to the arm so a power loop is not required
- Available in satin or polished stainless steel and silver enamel
- CE marked

## Technical Data

## Fire Test Certificate:

Certifire approved

### Certification:

Tested to EN1155 Classification 4.8.4/2.1.1.3

# Maintenance

To be carried out by approved specialists only.

A door stop must be fitted to limit the opening of the door.

Regularly check the assembly for tolerance and undue wear.

Tighten any screws or bolts that may become loose and adjust the closer if necessary. Annually grease the moving parts and check the operation of the doors adjusting if necessary. Repair works or any replacements have to be executed by the manufacturer or specialists authorised by the manufacturer.

If for any reason the products fail due to a defect in manufacture, contact us and we will advise you of the replacement procedure.

### Aspex UK Limited

Unit E, Winchester Avenue, Blaby, Leicester, LE8 4GZ T: 0116 278 3506 F: 0116 278 4069 E: sales@aspex-uk.co.uk

### As pex Scotland

39 Deerdykes View, Westfield, Cumbernauld, G68 9HN T: 01236 720061 F: 01236 780170 E: scotland@aspex-uk.co.uk